

SAS922PIT-ECH-485 Modulating Digital Thermostat

Installation and operation instructions

Proportional-Integral control

SAS922PIT-ECH-485 modulating digital thermostats are designed to provide Proportional-Integral (PI) provide modulating analog 0-10V control signal for Actuator and EC Fan Motor.

Technical Data

Power.....	220V AC	50Hz/60Hz
Temperature setting range.....	5°C-50°C	
Temperature display range.....	5°C-60°C	
Setting accuracy.....	0.5°C	
Display accuracy.....	0.1°C	
Ambient temperature-operation.....	0°C~+50°C	
Ambient temperature-transport.....	-10°C~+60°C	

Features

- Large LCD display with backlight
 - Touch button easy for operation
 - 0 to 10VDC or 0 to 20mA to control actuator and EC fan motor
 - On / off output heating for heater
 - Maintains the temperature to within 0.5 degree set point
 - Permanent user setting retention during power loss, no batteries are required
 - RS485 communication
 - External sensor or internal sensor option
 - 7 day programmable
 - Filer dirty alarm
-


IMPORTANT SAFETY INFORMATION:

- Always turn off power at the main power source by unscrewing fuse or switching circuit breaker to the off position before installing, removing, cleaning, or servicing this thermostat.
- Read all of the information in this manual before installing this thermostat.
- Only a professional contractor should install this thermostat.
- All wiring must conform to local and national building and electrical codes and ordinances.
- Use this thermostat only as described in this manual.

Button and Display


Thermostat Buttons and Switches

- ① Display area
- ② Power button (Short press to switch off thermostat; Long press into permanent hold mode in power on mode; Exit button)
- ③ Fan speed option button (HI MED LOW AUTO)
Long press into programming set in power on mode
- ④ Mode button (In programming status: heating / cooling mode , In non- programming status: heating / cooling / auto mode), / Menu button/time button/programmable button (Short press to set mode; Long press to set time, In programming status short press into next programming)
- ⑤ Raise button
- ⑥ Lower button

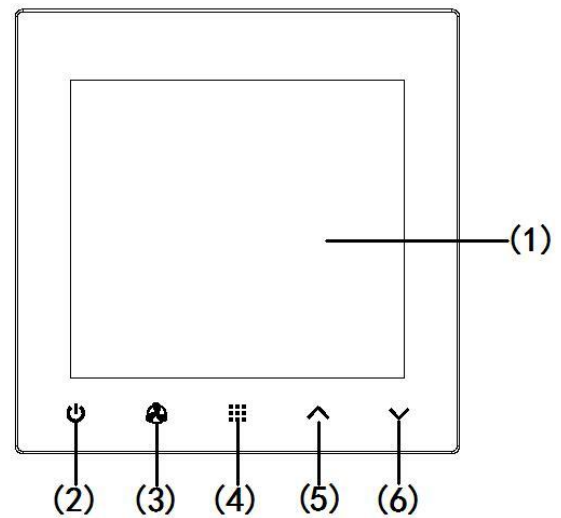


The Display

- ① Indicates thermostat is “calling” for cooling
- ② Indicates cooling mode or heating mode
- ③ Indicate filter dirty alarm
- ④ Indicates room card activate
- ⑤ Indicates fan status
- ⑥ Indicates room temperature/ setting temperature/time
- ⑦ Indicates programmable
- ⑧ Indicates week
- ⑨ Indicates No. in configuration
- ⑩ Indicates setting mode
- ⑪ Indicates permanent mode
- ⑫ Indicates time setting

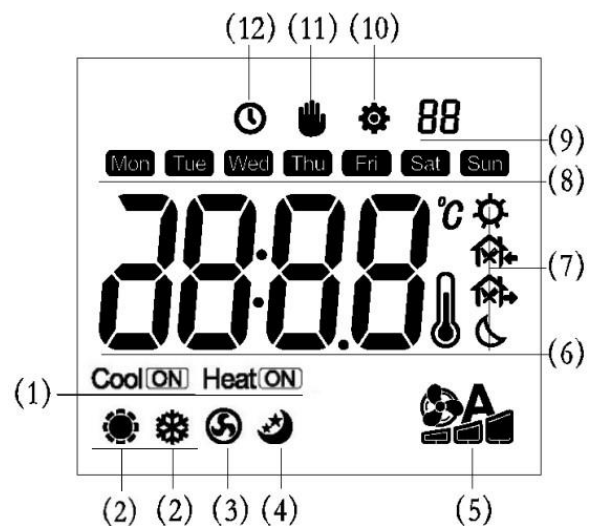


(11) and (12) show in same time mean it's in temporary hold mode
(10) and (12) show in same time mean it's in programming setting

INSTALL THE THERMOSTAT

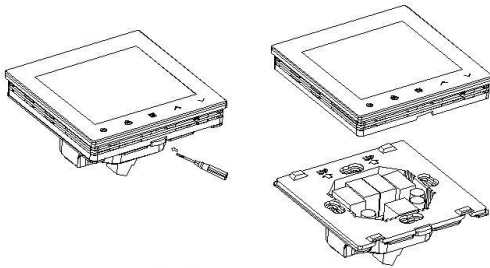


1. Gently opening the front panel by screw driver at the bottom open mouth.

Gently pulling the control panel straight off the base connector.


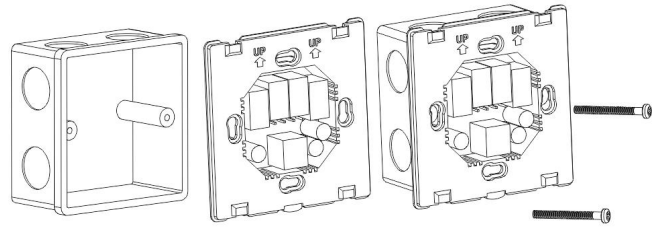


2. To screw for mounting thermostat in the wall.

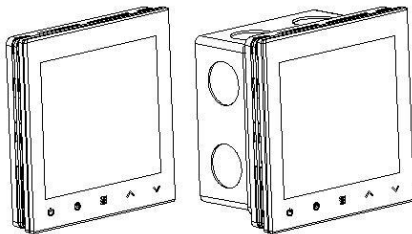

3. Fix the cover on the base.

WIRING DIAGRAM

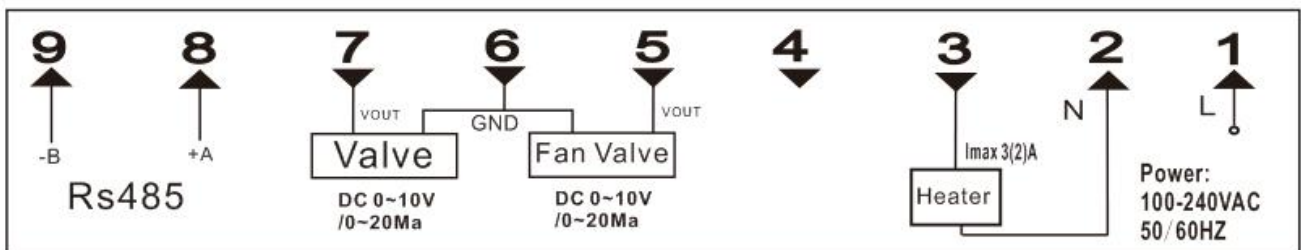


Thermostat Function Description


Cooling mode (Proportional-Integral (PI) control cooling)

Example: P-band is 2°C

The valve cooling output PI and the temperature differential(room temperature and setting temperature) as following picture

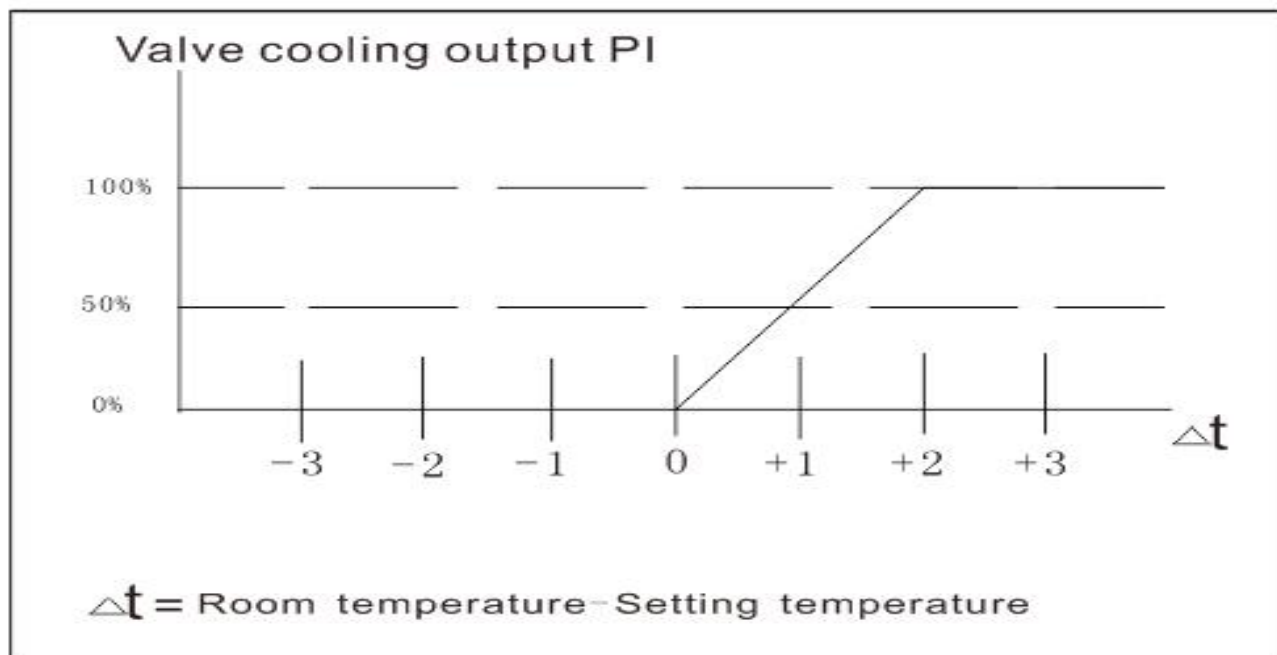

Heating mode



In auto mode,(set configuration menu PS as 0, can choose heating/ cooling/ auto mode)

When setting temperature $> 2^{\circ}\text{C}$ than room temperature will into auto heating mode, the working mode is the same as heating mode

When room temperature $> 2^{\circ}\text{C}$ than setting temperature will into auto cooling mode, the working mode is the same as cooling mode

Fan speed instruction


Press  can choose LOW,MED,HI and AUTO speed.

The output voltage of LOW speed fan in configuration is LS

The output voltage of MED speed fan in configuration is rS

The output voltage of HI speed fan in configuration is HS

When the mode is in AUTO speed ,the fan actuator and water actuator would give output in same time .

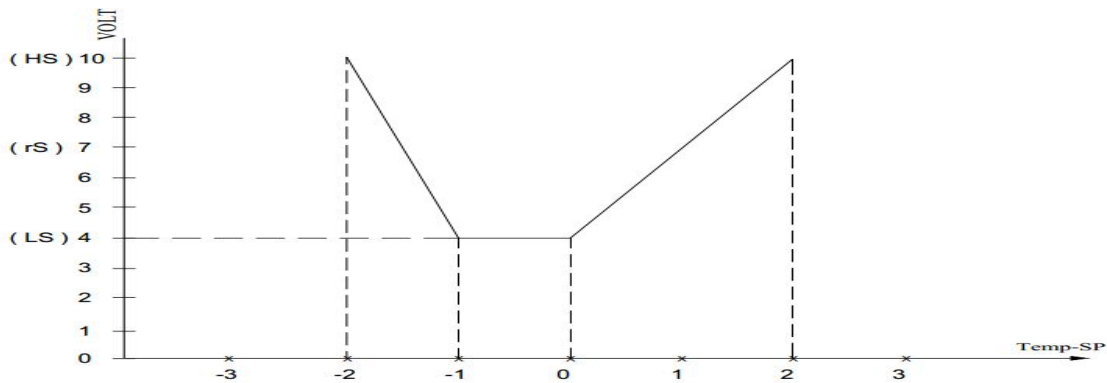

External sensor

When external sensor connected,thermostat will show temperature detected by external sensor.

When external sensor removed or open circuit,thermostat will show temperature detected by ambient sensor.

Configuration Menu operation

The configuration menu allows you to set certain thermostat operating characteristics to your system or personal requirements. Switch off the thermostat, long press button  more than 3 seconds to enter the configuration menu, The display will show the first item in the configuration menu 1. Press  button to shift to the next menu item, use  or  to select. To exit the menu , pressing power button to switch off the thermostat. Thermostat will exit the configuration menu if no buttons are pressed within 20 seconds. The configuration menu chart summarizes the configuration options. In implicit parameter menu mode, long press button  for 3 seconds, all parameter will back to the initial value.An explanation of each option as follows:

Item	Displayed (factory default)	Press  、  to select	Description
1	 (0)	-4 --- +4	Select temperature display adjustment higher or lower
2	 (35°C)	 —50°C	Select maximum temperature limitation
3	 (5°C)	5°C— 	Select minimum temperature limitation
4	 (2)	1/2/3	Select display backlight mode 1: without backlight 2:without any button, backlight will light off after 10 seconds 3: backlight will keep on always
5	 (rE)	rE/rd	Memorize option before power loss rE: With memorize option before power loss rd: without memorize option before power loss

6	 (1)	0/1	Fan stop option 0 :The fan output position would go to 0% 1:The fan output position decrease and keep always open in LOW
7	PA(0)	0/1	Valve stop option 0:The valve output position would go to 0% 1:The valve output position decrease and keep always open in 30%
8	AD(1)	1-255	RS485 Modbus communication
9	dC (2)	S1/S2	Function of terminal S1/S2 0: S1/S2 would be room card function 1: S1/S2 would be external sensor function 2: S1/S2 would be filter detected function No room card in automatic mode
10	CH (18℃)	5℃-CC	Select energy-saving temperature for heating in room card mode
11	 (25℃)	CH-50℃	Select energy-saving temperature for cooling in room card mode
12	 (SC)	SC/OC/OO	Activate energy saving mode option SC: with room card/filter detected, activate the energy mode by open circuit OC: with room card/filter detected, activate the energy mode by close circuit OO: without room card function/filter detected function
13	 (2℃)	1℃- 10℃	Select Proportional band
14	PS(0)	0/2/3/7	0: Non-programmable 2: 5+2 programmable 3: 5+1+1 programmable 7:7 days individual programmable
15	LS(4.0)	1.0~ rS v	Voltage in low speed
16	rS(7.0)	LS~HS v	Voltage in MED speed
17	HS(10)	Rs~10 v	Voltage in HI speed
18	Bd(2)	0,1,2,3	Baud rate 0:2400,1:4800,2:9600,3:19200
19	Cd(0)	0.1.2	verification mode 0: None parity 1: Odd parity 2: Even parity

Programmable Setting

Long press  over 3 second in power on ,it run into programmable setting menu (Keep you chose 5+2 programmable ,5+1+1 programmable or 7 days programmable) .Press ▲▼ to set time/adjust temperature.Press 

to go to next step. Press  to save what you setting and exit.

Excel 1 (7 days programmable factory setting)

COOL	1st	6:00	22℃
	2nd	8:00	24℃
	3rd	18:00	22℃
	4th	22:00	24℃

HEAT	1st	6:00	21℃
	2nd	8:00	16.5℃
	3rd	18:00	21℃
	4th	22:00	16.5℃

RS-485 MODBUS universal interface protocols

I、Basic description

Number	Parameter	Protocol provision
1	Operating mode	RS-485, master-slave; thermostat is the slave machine
2	Physical interface	A(+), B(-), GND three-wire system, or A(+), B(-) two-wire system
3	Baud rate	9600 (It can set in configuration menu)
4	Byte format	10 format (1 start bit + 8 data bits + 1 stop bit)
5	Transmission mode	RTU format (consult MODBUS standard)
6	Thermostat address	1—255
7	Command code	3, 6 (3—read thermostat, 6—set thermostat)
8	CRC check code	CRC-16 (consult MODBUS standard)
9	CRC verification mode	CRC-16 (consult MODBUS standard)
10	Data frame interval	Greater than 4 bytes

II、Read the thermostat frame format

Command frame (give by upper computer) : Read the conditioner state

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03 (readout command code)	00 (Start address) High byte	00 (Start address) Low byte	00 (register count) High byte	0A (register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4.....Byte 19	Byte 20	Byte 21
Thermostat address	03 (readout command code)	14 Bytes	Air conditioning state value	CRC low	CRC high

Byte	Value	instruction	Register address
Byte 4	00	Thermostat status is high byte: general is 00	0(ON/OFF)
Byte 5	00/01	Thermostat status is low byte: 00 –means close , 01—means open	
Byte 6	00	Thermostat mode is high byte: general is 00	1(MODE)
Byte 7	01-03	Thermostat mode is low byte,1-cool,2-heat ,3-auto	
Byte 8	00	Thermostat fan speed is high byte,general is 0	2(Fan speed)
Byte 9	00-03	Thermostat fan speed is low byte	
		00--Auto speed	
		01 – High speed	
		02 – Med speed	
		03 – Low speed	
Byte 10	XX	Setting temperature high byte	3(setting temperature)
Byte 11	YY	Setting temperature low byte	
Byte 12	00	Proportional water Valve position high byte	4(Proportional water valve position)
Byte 13	00	Proportional water Valve position low byte	
Byte 14	00	External sensor's temperature high byte	5 (External sensor's temperature)
Byte 15	00	External sensor's temperature low byte 0XFFFF-Alarm	
Byte 16	00	Thermostat temperature current status high byte	6 (Room temperature)
Byte 17	00	Thermostat temperature current status low byte	
Byte 18	00	Room card status high byte	7(Room card status)
Byte 19	00	Room card status low byte	
Byte 20	00	Filter dirty status high byte	8(Filter dirty status)
Byte 21	00	Filter dirty status low byte	
Byte 22	00	Reserved 1 high byte	9(Reserve)
Byte 23	00	Reserved 1 low byte	
Byte 24	00	Reserved 1 high byte	10(Reserve)
Byte 25	00	Reserved 1 low byte	
Byte 26	00	Proportional fan actuator position high byte	11(Proportional fan actuator position high byte)
Byte 27	00	Proportional fan actuator position low byte	

III、Read the thermostat frame format

Command frame 1: Read the thermostat ON/OFF state

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(readout command code)	00 (start address) High byte	00 (start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Thermostat address	03 (command code)	02 (Bytes)	00(ON/OFF state high byte)	XX(ON/OFF state low byte)	CRC low	CRC high
--------------------	----------------------	---------------	----------------------------	---------------------------	---------	----------

ON/OFF state value: 0000 – Fan coil OFF, 0001 – Fan coil ON

Command frame 2: Read the thermostat mode state

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(readout command code)	00(start address) High byte	01(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	00(Mode status High byte)	XX(Mode status Low byte)	CRC low	CRC high

Mode state value: 0001– cooling

Command frame 3: Read the thermostat fan speed state

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(readout command code)	00(start address) High byte	02(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	00 Fan speed High byte	XX Fan speed Low byte	CRC low	CRC high

Fan coil state value: 0000-Auto,0001 – High, 0002– Medium, 0003– Low

Command frame 4: Read thermostat setting temperature

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	03(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	XX (Setting temperature) High byte	YY (Setting temperature) Low byte	CRC low	CRC high

Temperature value is 0x012c,high byte 01, low byte 2c,

0x012c= 300 (setting temperature only can be the multiple of 5, the range is 50~350) setting temperature is

30.0°C

Command frame 5: Read the thermostat proportional water valve position

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	04(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	05(Proportional valve position) High byte	XX(Proportional valve position) Low byte	CRC low	CRC high

0-100%

Command frame 6: Read the thermostat external sensor's temperature

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	06(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	XX(external sensor's temperature) High byte	YY(external sensor's temperature) Low byte	CRC low	CRC high

Temperature value 0Xxxyy is 0x012c ,high byte 01,low byte 2c

0x012c=300 room temperature is 30°C. 0xFFFF is alarm

Command frame 7: Read the thermostat current temperature value

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	05(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	XX(current temperature value) High byte	YY(current temperature t value) Low byte	CRC low	CRC high

Temperature value is 0x012c ,high byte 01,low byte 2c

0x012c=300 room temperature is 30°C

Command frame 8: Read the thermostat room card status(DC is 0)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	07(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	00(room card status) High byte	XX(room card status) Low byte	CRC low	CRC high

0000-insert room card status ,0001--pull out room card status

Command frame 9: Read filter dirty status(DC is 2)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	08(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	XX(filter dirty status) High byte	YY(filter dirty status) Low byte	CRC low	CRC high

0000-Filter is normal 0001-filter alarm

Command frame 10: Reserve

Command frame 11: Reserve

Command frame 12: Read proportional fan actuator position

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	03(command code)	00(start address) High byte	09(start address) Low byte	00(register count) High byte	01(register count) Low byte	CRC low	CRC high

Response frame (give by thermostat)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Thermostat address	03 (command code)	02 (Bytes)	XX(Proportional fan actuator status) High byte	YY(Proportional fan actuator status) Low byte	CRC low	CRC high

0-100%

IV、Set the thermostat frame format

Command frame 1 (give by upper computer) set the thermostat ON/OFF

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	06(command code)	00(start address) High byte	00(start address) Low byte)	00(Setting value high byte)	XX(Setting value low byte)	CRC low	CRC high

Setting value: 0000 – thermostat OFF, 0001 – thermostat ON;

Response frame: correctly operate, the instruction will return to the same;

Operation is not correct does not response, the upper computer will manage;

The rule about subsequent response of setup command is same with this.

Command frame 2 (give by upper computer) set the mode

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	06(command code)	00(start address) High byte	01(start address) Low byte)	00(Setting value high byte)	XX(Setting value low byte)	CRC low	CRC high

Setting value: 0001 – cool

Command frame 3 (give by upper computer) set the fan speed

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	06(command code)	00(start address) High byte	02(start address) Low byte)	00(Setting value high byte)	XX(Setting value low byte)	CRC low	CRC high

Setting value: 0000-Auto,0001- High speed, 0002- Mid speed, 0003- Low speed

Command frame 4 (give by upper computer) set the setting temperature

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Thermostat address	06(command code)	00(start address) High byte	03(start address) Low byte)	XX(Setting temperature high byte)	YY(Setting temperature low byte)	CRC low	CRC high

High byte XX: 01 Low byte YY:2c

0x012c= 300 (setting temperature only can be the multiple of 5, the range is 50~350) setting temperature is 30.0°C

CUSTOMER ASSISTANCE

After reading this guide, if you have any question about the operation of your thermostat, please contact your installer or service provider.