# SAS965WHL-7-WIFI(TY) manual


#### Features

- 480\*480 pixel 4-inch color screen display
- Anti-freeze function
- · Preheating function
- · Multi-language menu optional
- 7-day programming control
- Multiple control system optional: dual temperature control, room temperature control, floor temperature control


# 

#### Specification

- · Power source: AC100~240V, 50/60Hz
- · Current temperature display range: 0°C~50°C
- Floor temperature display range: 0°C~70°C (NTC external sensor measuring range)
- Current temperature setting range: 5°C~70°C
- External sensor control range/Floor temperature protection range: 5°C~70°C
- Accuracy: 0.1℃
- External sensor: NTC 10K / NTC 100K
- Storage temperature range: -20°C~70°C; 5~95% (no condensation)
- Network frequency: 2.4GHz WIFI
- Screen: 4-inch IPS screen, capacitive touch screen (71.86\* 67.96mm, 480\*480)
- · Dimensions: 86x86x12mm
- IP Rating: IP21



# Installation




1. Install the steel plate.


2. Mounting screws.

3.Snap on the unit.

### Wiring diagram



# Display

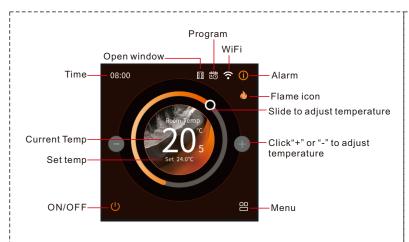

Touch anywhere on the screen to light up the screen.

#### WiFi icon

Connected Internet: always on. Disconnected: Hidden

#### Alarm

White icon indicates no alarm information. Yellow icon indicates alarm information

#### Time

Factory default time is 08:00 on January 1, 2025. (Note: Setup is required after factory reset.)

#### ON/OFF button


Touch to enter the power off mode (display the current temperature); On power off mode, touch the power on icon in the middle of the screen to return to the power on mode.

#### Temporary mode

keep flash. The programming will switch to programming in next schedule.

#### Adjust temperature

Adjust the temperature with the dial or by " + " and " - " button. Temperature can be adjusted in increments of 0.5 degrees. The factory default heating is 21°C.



#### **Boost setting**

#### **Boost function**

Default setting: OFF.

The adjustable range is from 1 to 12 hours, in 1-hour increments. Factory default: 1 hour.



#### Program setting

Default setting: Manual mode at 21°C. (Factory default: ON)





Click the target period to set the time and temperature. Tips:Copy programmable setting by clicking "Copy" icon.



Time and temperature setting interface



Press"copy" icon to copy program interface. Select the day you want to copy.


## Default heating programming (6 period programming)

Programming function is OFF in factory default.

Week Periods	Morning		Out door		Back home		Out door		Back home		Sleep	
Monday to Sunday	6:00	21°C	8:00	16.5°C	12:00	21°C	14:00	16.5°C	18:00	21°C	22:00	16.5°C

# Holiday mode setting





Click the corresponding button to set the start time, end time, and temperature.



Holiday mode interface

# Alarm information

Monitor alarm information:NTC temperature, open window state, optimum start state, load relay state.

Note: NTC temperature, temperature data is available only when NTC is connected)

Click here to monitor alarm informations



APP alarm code	Local alarm prompt	Meaning	Heating State
E1	Built-in temperature sensor failure	Built-in temperature sensor failure.	OFF
E2	External NTC sensor failure	Fault detection is only enabled under dual temperature dual control or floor temperature control systems.	OFF
E3	High temperature alarm (floor temperature is higher than the protection temperature)	In dual temperature dual control mode, the floor temperature exceeds the floor protection maximum limit.	OFF
E4	Low temperature alarm (floor temperature is lower than the protection temperature)	In dual temperature dual control mode, the floor temperature is lower than the floor protection minimum limit.	ON
<u>B8</u>	Display open window icon" 預"	To save energy, if the thermostat detects a sharp drop in room temperature, it will shut down heating. Please check if a window is open.	OFF

# Setting

This is a collection of functions and parameters available to the device user. They allow the controller's operation to be tailored to individual preferences and needs.



Item	Default	Description	
Brightness	Level 3	Adjusting the display brightness allows you to adjust the luminance level to ambient conditions and user preferences.	
Screen timeout	15s	The screen blanking function allows you to automatically turn off the display after a specified period of time. This allows the device to save energy and reduce unnecessary lighting, especially at night.	
Power-Off memory	ON	The controller is equipped with a settings memory function, thanks to which the saved configurations are retained even after the power supply is disconnected.	
Child lock	OFF	The Child lock function allows you to protect access to the controller settings against unauthorized changes by children.	
Mute	OFF	This function mutes the sound produced when operating the controller screen.	
Optimum start	OFF	The optimum start adjust the starting time for home heating according to user program setting. User program the time that it should come on desired temperature in correct time.	
Frost protection	OFF	When the user is away for an extended period, the room temperature may drop significantly, potentially causing damage to home devices due to freezing. To prevent this, the thermostat will automatically turn on heating when t room temperature falls below 5°C, and turn it off when the temperature rises to 8°C.	
Open window function	OFF	To save energy, if the thermostat detects a sharp drop in room temperature, it will shut down heating. Please check if a window is open.	
Time setting	ON	ON:24-Hour Clock OFF:12-Hour Clock	
	ON	ON:Time Sync OFF:Manually adjust the time	
Engineering setting	1	The password "1230"	
Language setting	English	Chinese/English	

#### Engineering parameter table

Item	Default	Description	
Control system	Room temperature	Dual/Room/Floor Dual: The thermostat controls based on the actual room temperature detected by the internal sensor and compares it to the floor temperature limit. If the floor temperature exceeds the limit of "Max floor temp set," the system stops working. If the floor temperature is lower than the limit of "Min floor temp set", the system will force heating.  Room: The thermostat is controlled by an internal sensor and displayed as room temperature.  Floor: The thermostat is controlled by an external sensor and displayed as room temperature.	
Sensor selection	100K	10K/100K	
Switch differential	1.0°C	0.5~5°C(Step 0.5°C)	
Min room temp set	5.0°C	5~20°C(Step 1°C)	
Max room temp set	35.0°C	28~70°C(Step 1°C)	
Min floor temp set	5.0°C	5~20°C(Step 1°C)	
Max floor temp set	40.0°C	21~70°C(Step 1°C)	
Temp correction	0.0°C	-5~5°C(Step 0.5°C)	
Linkage port output mode	NC	NO/NC (NO: With normally open drive; NC: With normally closed drive)	
Restore factory default	/	After selecting the confirm button, all parameters will be restored to factory default values.	

# Link with APP

#### Registration and login:

Click App store(click Android application market)



2 Search "TuyaSmart" and download.



3 Click the "Register" to create account.

When you finish the register, log in your mailbox and click on the link to activate your account, then can login APP.







Register

Login

#### For the device:










1. Enter the "HOME" interface of the app, click "Add device", or click the "O" in the upper right corner, click "Add device".

Tips: Turn on the Wifi and Bluetooth of your smartphone.



2. Click your device.



3. Enter your wifi account and password, click "Next"



4. Wait a few seconds until the search progress is 100%".



5. Click "Done", it means the device added successfully.

# **APP** interface



