



Receiver specifications

- Supply Voltage: 100-240VAC 50/60Hz
- Wireless protocol type: Tuya zigbee
- Radio Frequency Range: 2.4GHz
- Protection Level: IP21
- Shipping & storage temperature: -10°C~70°C
- Working environment: 0°C to 40°C, 10% - 95% RH Non-condensation
- Wireless transmit range: 30M in the open air

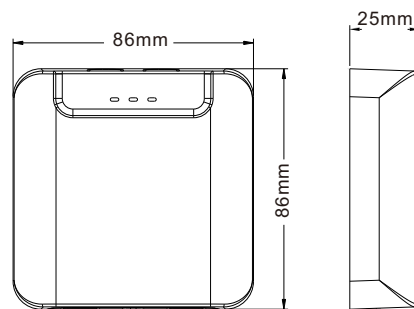


- (1) Power indicator
 (2) Distribution network indicator
 (3) Heating indicator
 (4) Distribution network button
 Long press the button for 3s to distribute the network.
 (5) Boost function button
 Press the button to switch heating mode or stop heating.

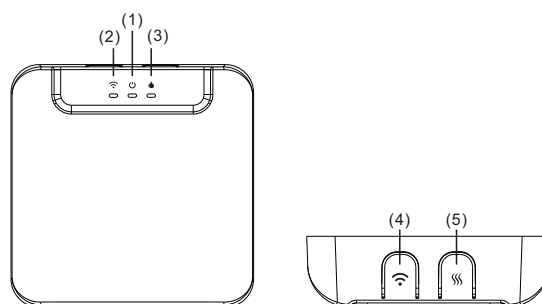


Installation

Flush Mounted




Pry open the two covers
(Red wireframe part)


1. Pry open the two covers on the back.




2. Connect the terminals in the correct way.
Then mounting the fastening crimping bar screws.




3. Mounting screws.
Buckle into the panel from top to bottom.




4. Tighten the screws at the bottom and complete.




Surface Mounted



1. Connect the terminals in the correct way.



2. Mounting the fastening crimping bar screws




3. Mounting screws. Buckle into the panel from top to bottom



4. Tighten the screws at the bottom and complete.

Wiring diagram

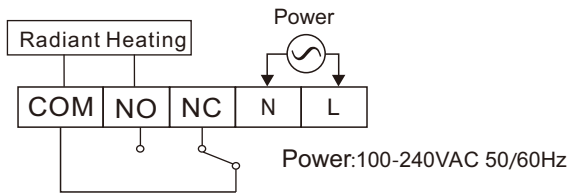

I_{max}:250VAC / 5(3)A

Link APP (Login)

Download:

Click App store or Android application market to download "Tuya Smart" app.

Registration and Login:

Click the "Register" to create account.
Enter your account password to log in.



Tuya Smart

Register

Register

Register

Mobile Number/Email

Create account

Log In

Please enter the account

Password

Login

Link APP (Add devices)


Add gateway:

Tips: Turn on the Bluetooth and Wifi of your mobile phone.


1 Enter the "HOME" interface of the app, Click the "Add".




2 Enter your wifi account and password, Click "Confirm".



3 wait a few seconds until the search progress is 100%.



4 Click "Done", it means the gateway added successfully.



* **Tips** Before binding the gateway, you need to power on the gateway.
When binding a gateway, the mobile phone and the gateway must connect to the same network.