

INSTRUCTIONS

SAS980XSWT-7-B01(US)
SAS980XSWT-7-B01(EU)

INSTRUCTIONS

SAS980XSWT-7-B01(US)

SAS980XSWT-7-B01(EU)



Content

Water timer introduction.....	01
Main function.....	02
Installation.....	04
Link APP.....	08

Technical parameter

The power supply: 2x1.5V AA alkaline batteries (LR6)

Battery life: one year

Working temperature: 1°C~50°C

Storage temperature range: -10~60°C

Transport temperature range: -10~60°C

Solenoid valve working life: 20W times

Frequency: Bluetooth 5.0

Wireless transmission distance: Open distance $\leq 10M$


Protection level: IP54

Maximum water pressure range: 0.03~0.8MPa

Display: LED indicator

Low voltage alarm: 2.4V alarm, 2.2V forced shutdown

Low temperature alarm: 5°C

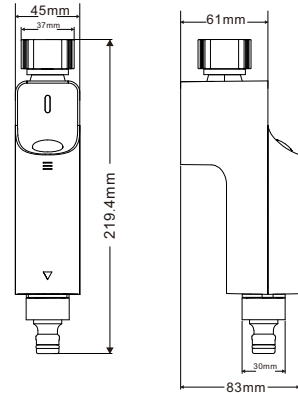

Main function

Manual mode:

The watering function can be turned on/off through the buttons on the water timer. The watering function can also be turned on/off remotely through the manual switch on the APP.

Programming function:

Users can set and program various conditions such as daily/multi-day/weekly cycle through the APP (only support 4 segments of program running at the same time)

Rain delay function:

The watering device can read third-party weather software data through the cloud platform. According to the weather conditions, can manually set a delay of 24 hours, 48 hours or 72 hours of watering, and automatically cancel the preset watering within the delay period.

Alarm function:

When the battery is low, the alarm information will be actively pushed to the APP. When the working environment is low, it will actively push the alarm information to APP.

Remote control function:

Support remote control of timing switch electric valve to realize remote watering function.

Voice control function:

By connecting with Amazon alexa and Google assistant voice speakers, the voice control watering function can be realized.

Anti-leakage design:

Use standard threaded NH3/4-11.5 or G3/4-14 and NH1/2 adapter design.

Power-off memory:

Programming data, pairing information.


Anti-freezing function

Press and hold the switch button of watering device for 8 seconds until the green light flashes twice to turn on the antifreeze function; press and hold the switch button of watering device again for 8 seconds until the red light flashes twice to turn off the antifreeze function. The factory default antifreeze function is off.


Tips: When the antifreeze function is turned on, and the temperature is lower than 5°C, the watering device will automatically shut down. It will run until the temperature is higher than 5°C.

Install battery


1 Open the battery slide cover.




2 Remove the battery compartment





3 Install the battery





4 Install the battery slide cover

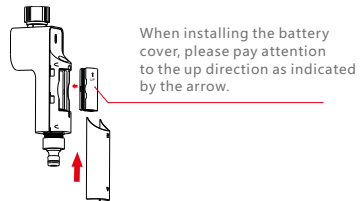

Installation

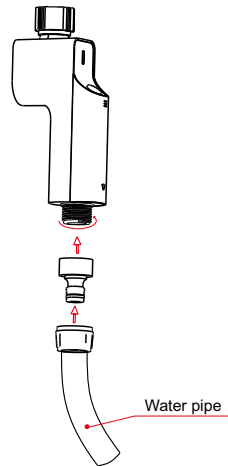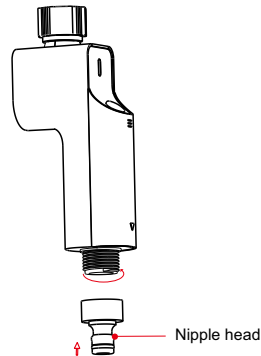


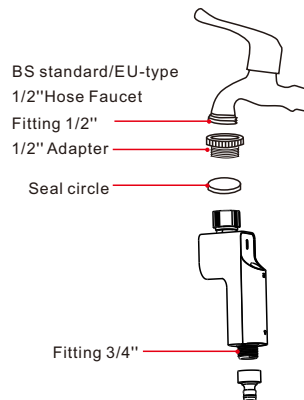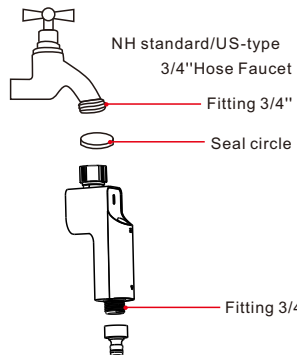

LED indicator

*Pairing and networking indicator:
the red and green lights flash alternately.

*Power on: the red light is on for 1s



Manual switch button for
watering device

Short press once: open/close the valve

Manual control(without WIFI connect or
loss connect): watering 10 min.

App control(Connected WIFI): Set to 15
min that watering 15 min.
Set to 30 min that watering 30 min.

LINK APP

Link APP-Login

Download:


Click App store or Android application market to download "TuyaSmart" APP.




Registration and Login:

Click the "Register" to create account.

Enter your account password to log in.



Register



Create account




Login


LINK APP-without bluetooth gateway

Tips: Please turn on your Bluetooth and Location Information on your cell phone.

- 1 Enter the "HOME" interface of the app, Click the "+" in the upper right corner .




- 2 Click "Auto Scan"



- 3 For timer: long press the power button for 3 seconds.

Tips: During pairing, the water timer indicator light flashes red and green alternately




- 4 Click " Next " .



- 5 Wait a few seconds .



- 6 Click "Done", it means the device added successfully.




Link APP-with bluetooth gateway

Add gateway:

Please turn on your Bluetooth and Location Information on your cell phone.

- 1 Enter the "HOME" interface of the app, Click the "+" in the upper right corner .



- 2 Click "Auto Scan", Click "Go to add "



- 3 Click "+"



- 5 wait a few seconds until the search progress is 100%



- 4 Enter your wifi account and password
Click "Confirm "



- 6 Click "Next", then click "Done", it means the gateway added successfully.



* Tips


- Before binding the gateway, you need to power on the gateway.
When binding a gateway, the mobile phone and the gateway must connect to the same network.

Add Timer

Tips: Please turn off your Bluetooth at first.

- 1 For timer: long press the power button for 3 seconds.


Tips: During pairing, the water timer indicator light flashes red and green alternately



- 2 Click "Search new subdevice".



- 3 Click "Light is in a flash".




- 4 Search device.....
Wait a few seconds .



- 5 1 device has been successfully added ,click " DONE " .




- 6 Click "Done", it means the device added successfully.





* Tips

- Gateway must be added before adding water timer.
- One gateway can be paired with 10 pcs water timers, but only support 3pcs simultaneous online on the APP, the remaining water timer needs to be refreshed to be online.

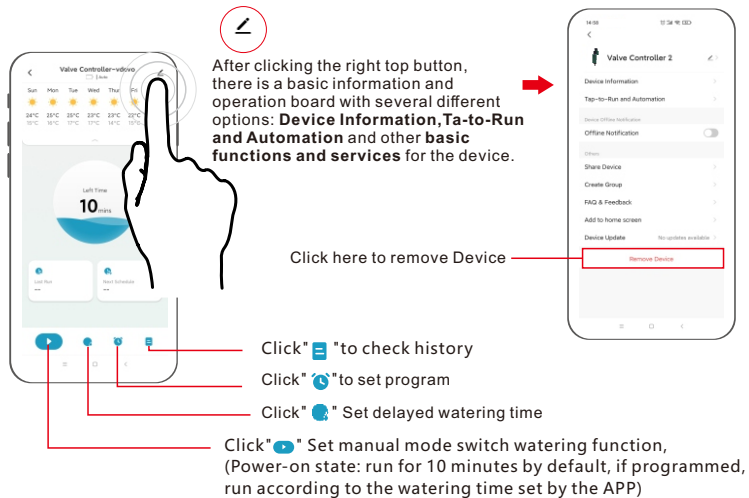


Set Timed Watering

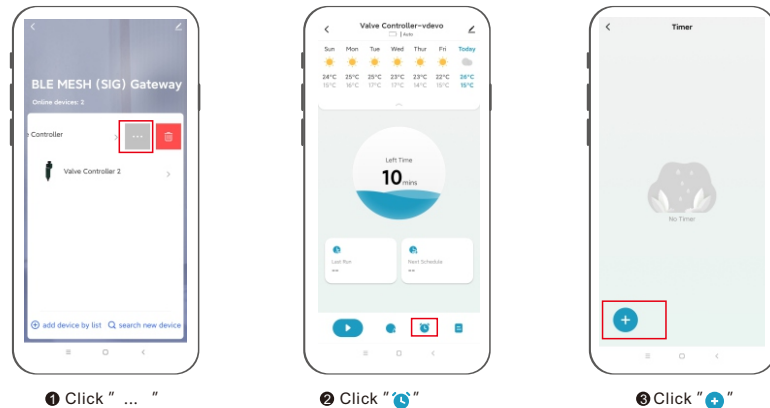

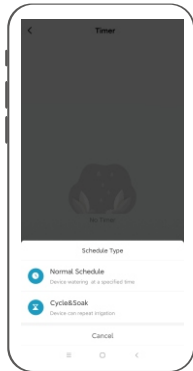


- ④ Choose the type of programming according to your needs.

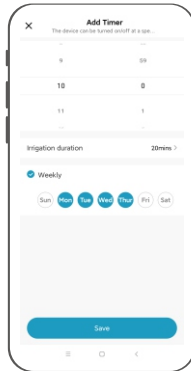

Normal Schedule


This setting means: every Monday, Tuesday, Wednesday, Thursday at 10:00 start watering 20 minutes.

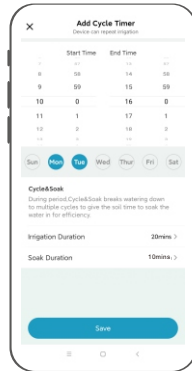


Cycle & Soak

This setting means: every Monday, Tuesday 10:00-16:00 every 40 minutes water 10 minutes.

Delayed watering

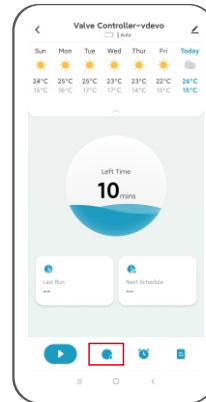


- ① Click "Delayed Watering"


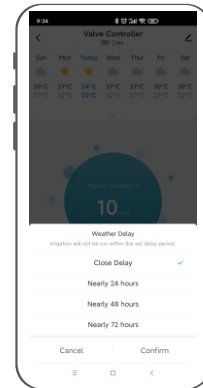


- ② Set the delayed watering time as needed, click "Confirm"

Irrigation History

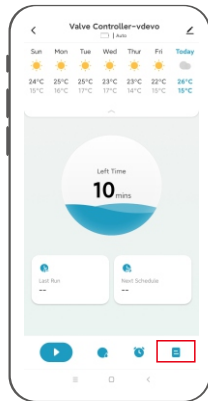


Click "  ", view your irrigation history.

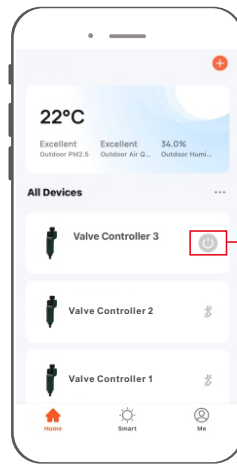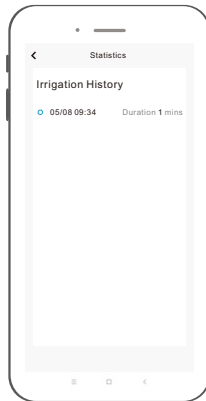


If you are not connected to the gateway, you can directly click here to start watering the icon will turn green“  ”

If without any operation in two minutes, it will loss connection, you need to refresh to operate.

Restore factory default settings

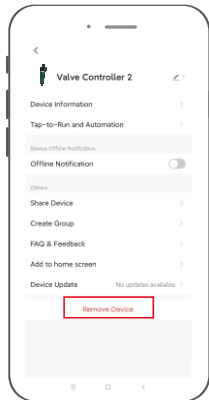

① Click "Remove Device"

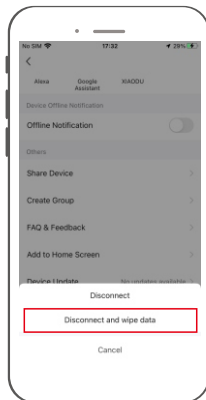

② Click "Disconnect and wipe data" and re-pair the network to restore factory default settings.

Voice command:

After waking up the speaker, you can say:

Amazon Alexa

- * Alexa, open <device name>.
- * Alexa, close <device name>.

Google Assistant

Tips: you need connect to the Google speaker

- * Ok, Google, start <device name>.
- * Ok, Google, stop <device name>.

* Tips: You can name the device yourself.

FCC Radiation Exposure Statement:



FCC ID:2AOIFSAS980SWT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.