


S A91

Operation Instructions

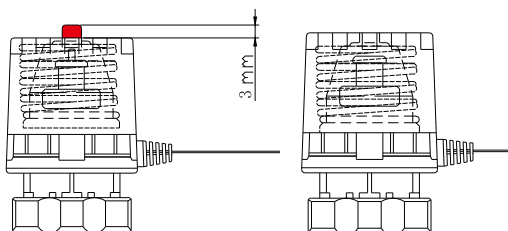

U=230V $\pm$ 15%	U=230V $\pm$ 15%
P= $\sim$ 2 W	P= $\sim$ 2 W
IMAX=200MA	IMAX=300MA
Ip45	Ip45
-5 $^{\circ}$ Cbis60	-5 $^{\circ}$ Cbis60
F= $\sim$ 110 N	F= $\sim$ 110 N

Electro-thermal Actuator

Technical data

- 1 Voltage : AC 230V
- 2 Power consumption : $\leq$ 2W
- 3 Stroke : $\geq$ 3mm
- 4 Force : 130N>F $\geq$ 80N
- 5 Ambient temperature : -10 $\sim$ +60 $^{\circ}$ C
Ambient humidity : $\leq$ 90%
- 6 Protective housing : IP45
- 7 Valve interface : M30 $\times$ 1.5mm

