## **Specification**

- \* Power supply: 100~240VAC 50/60Hz
- \* Standby Power Consumption: ≤2W
- \* Display accuracy: 0.1°C
- \* Temperature setting step: 0.5℃
- \* Communication: Modbus 485/ 2.4G WIFI
- \* Displayed temperature range: 0~70°C
- \* Operating temperature range: 0~50°C
- \*Temperature setting range: 5~35°C

## **Display**



Touch "#" button to switch fan speed. A spinning "4" icon indicates that the fan is currently running.




#### Mode button

Touch " button to switch different mode.







#### Installation

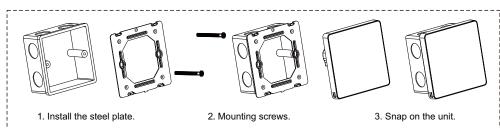






### Wiring diagram

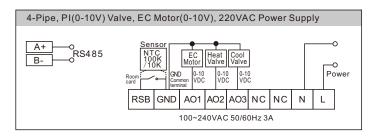

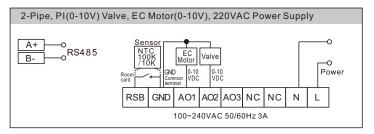

## **Programming setting (Default)**

When the system is set to programmable mode, you can configure the schedule here.







28℃

Tue Wed Thu Fri Sat Sun

Tips: Copy programmable setting by clicking "Copy" icon.

#### Default programming (6 period per day)

#### Default setting(Cooling)


Monday	Morning		Out	door	Back home		Out door		Back home		Sleep	
Sunday	7:00	24°C	8:00	28°C	12:00	24°C	14:00	28°C	18:00	24°C	22:00	26°C

#### Default setting(Heating)

Monday	Morning		Out	door	Back home		Out door		Back home		Sleep	
Sunday	7:00	21°C	8:00	16°C	12:00	21°C	14:00	16°C	18:00	21°C	22:00	16°C

## **Timer setting**

When the system is set to timer mode, you can configure the schedule here. It could switch thermost at on/off based on setting time.

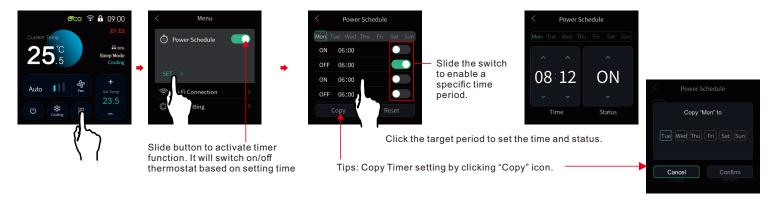

## Sleep mode setting


When the system is set to sleep mode, you can configure the schedule here.

Cooling mode: To promote more comfortable sleep and reduce energy consumption, the setpoint temperature will automatically increase by 1°C after one hour during sleep mode is activated. After two hours, the setpoint will increase by 2°C and remain at this temperature until sleep mode is automatically canceled after a total of 8 hours. Once this period ends, the setpoint temperature will automatically return to its original preset value.


Heating mode: To ensure comfortable sleep while saving energy, the setpoint temperature will automatically decrease by 1°C after one hour aduring sleep mode is activated. After two hours, the setpoint will decrease by 2°C and maintain that temperature until sleep mode is automatically canceled after a total of 8 hours. When this time elapses, the setpoint temperature will automatically revert to its initial preset value.



## **User setting**

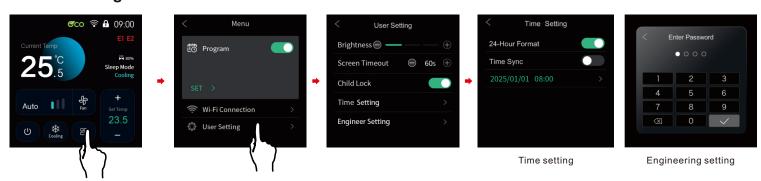

Item	Default	Description			
Brightness	Level 1	Adjusting the display brightness allows you to adjust the luminance level to ambient conditions and user preferences.			
Screen Timeout	60s	The screen blanking function allows you to automatically turn off the display after a specified period of time. This allows the device to save energy and reduce unnecessary lighting, especially at night. (Setting range:60s,90s,120s,150s,180s)			
Child Lock	OFF	To prevent accidental operation by children, users can enable the child lock function. Once enabled, the child lock icon " " will be displayed on the main screen. When the screen is turned off, it will be locked. Upon turning the screen back on, the main interface will appear, but any attempt to operate controls will prompt for a password (child lock password: 2301). If no operation is performed within 60 seconds, the system will automatically return to the main interface.			
	ON	ON: 24-Hour clock; OFF: 12-Hour clock			
Time setting	ON	ON: Timer sync(device will correct time based on network after connected Wifi) Factory default: 2025/01/01 08:00 OFF: Manually adjust the time.			
Engineering Setting	1	The password "1230"			

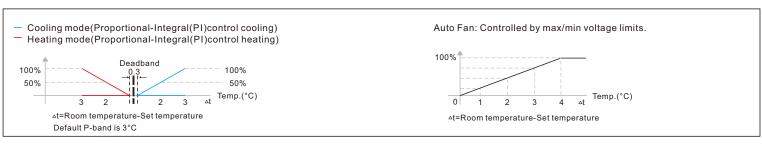

# **Engineering Parameter Table (Engineering Password: 1230)**

NO.	Parameter name	Parameter name Option		Description	
1	Rs485 address	1~254	1	RS-485 communication address	
2	Baud rate	ud rate 4800/9600/19200/38400		RS-485 baud rate	
3	Temperature calibration -5~+5°C		0	Sensor calibration(external sensor is not available)	
4	Maximum setpoint	aximum setpoint 20~35°C		It could set the maximum setpoint temperature range	
5	Minimum setpoint	5~20℃	18°C	It could set the mainimum setpoint temperature range	
6	Power-off memory	ON/OFF		ON: After a power outage and subsequent restoration, the thermostat will return to its previous state before the power loss.  OFF: After a power outage and subsequent restoration, the thermostat will remain in the OFF state.	
7	Fan delay off	0/30/60S	30S	After the valve is closed, the fan remains on for a delay to dissipate residual heat from the coil.	
8	Fan stop option(H)	in stop option(H) ON/OFF		ON: Fan and valve switch on/off simultaneously OFF: The fan runs at low speed when the valve is closed.	
9	Fan stop option(C)	ON/OFF	OFF	ON: Fan and valve switch on/off simultaneously OFF: The fan runs at low speed when the valve is closed.	
10	2/4 pipe option	pe option 2/4		2: Two-pipe system 4: Four-pipe system	
11	System type	CO/CO&HE	CO&HE	System mode option CO:Cooling+Ventilation CO&HE:Cooling+Heating+Ventilation	
12	External input	NO/Sen/Card	NO	No: Temperature is detected by the internal sensor. Sen: Temperature is detected by the external sensor.(It should be NTC100K) Card: Room card occupancy signal	
13	ECO heat	5~35°C	18°C	When the room card indicates unoccupied status, the system switches to	
14	ECO cool	5~35°C	28°C	energy-saving temperature.	
15	Program option	Timer/PROG/OFF		Timer: scheduled thermostat on/off PROG: Programming function OFF: Sleep function	
16	°C/°F	°C/°F	°C	Temperature unit	
17	Proportional band	1~5°C	3	Valve opening proportional band	
18	Min valve open	1~5V	1	Minimum valve opening: If the calculated opening is less than the minimum opening, the output voltage will be 1V.	
19	Valve interval	30~300S	60S	Run time interval when activate actuators	
20	Max fan voltage	1~10V	10	Maximum fan voltage and minimum fan voltage under auto fan.	
21	Min fan voltage	1~10V	3	waxiiidiii fan voltage and iiiiiiiiidii fan voltage under auto fan.	
22	High fan voltage	1~10V	9		
23	Med fan voltage	1~10V	5	Manual fan speed voltage.	
24	Low fan voltage	1~10V	3		

## Modbus

Add- ress	Description	Read/ Write	Options					
0	Power on/off	R/W	0:OFF, 1:ON					
1	Setting temperature	R/W	5~35°C					
2	Fan speed	R/W	0: Auto, 1: Lower, 2: Medium, 3: High					
3	Mode	R/W	1: Cooling 2: Heating 3: Ventilation					
4	Key lock	R/W	0: Disabled 1: Enabled					
5	Sleep mode	R	0: Disabled 1: Enabled					
6	Room temperature	R	0~70°C					
7	Room humidity	R	0~99%, FF: No humidity function					
8	External sensor temp.	R	0~70°C, FF: No external sensor function					
9	Room card status	R	0: Unoccupied 1: Occupy FF: No room card function					
10	Alarm	R	0: No alarm 1: Internal sensor error 2: External sensor error					
11	Rs485 address	R/W	1~254					
12	Baud rate	R/W	0:4800 1:9600 2:19200 3:38400					
13	Temperature calibration	R/W	-5~+5°C					
14	Maximum setpoint	R/W	20~35°C					
15	Minimum setpoint	R/W	5~20°C					
16	Power-off Memory	R/W	0: ON 1: OFF					

17	Fan delay off	R/W	0/30/60S				
18	Fan stop option(H)	R/W	0: ON, 1: OFF				
19	Fan stop option(C)	R/W	0: ON, 1: OFF				
20	2/4 pipe option	R/W	0: Two-pipe, 1: Four-pipe				
21	System type	R/W	0: CO, 1: CO&HE				
22	External input	R/W	0: Internal sensor 1: External sensor 2: Room card				
23	ECO heat	R/W	5~35°C				
24	ECO cool	R/W	5~35°C				
25	Program option	R/W	0: Sleep 1: Timer 2: Programming				
26	Temperature unit	R/W	0: °C 1: °F				
27	Proportional band	R/W	1~5°C				
28	Min valve open	R/W	1~5V				
29	Valve interval	R/W	30~300S				
30	Max fan voltage	R/W	1~10V				
31	Min fan voltage	R/W	1~10V				
32	High fan voltage	R/W	1~10V				
33	Med fan voltage	R/W	1~10V				
34	Low fan voltage	R/W	1~10V				

### **Link with APP**

#### Registration and login:

- Click App store(click Android application market)
- 2 Search "TuyaSmart" and download.
- 3 Click the "Register" to create account. When you finish the register, log in your mailbox and click on the link to activate your account, then can login APP.



Tips: Turn on the Wifi and Bluetooth of your smartphone.

#### For the device:























- 1. Click" + ", click "Add Device".
- 2. Click your device.
- 3. Enter your wifi account and password, click "Next"
- 4. Adding...

5. Click "Done", it means device added successfully.



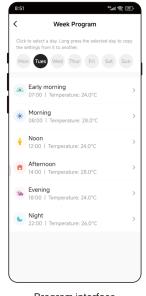

Program interface Click the target period to set the time and temperature

## Voice command :

\* Tips: you need connect to the Google and Alexa speaker. After waking up the speaker, you can say:

#### Amazon Alexa

- \* Alexa, open <device name>
- \* Alexa, close <device name>
- \* Alexa,make it cooler in <device name>.
  - \* Alexa,set <device name>to twenty.
- \* Alexa, make it warmer in <device name>. \* Alexa,set <device name> to <mode value>.
- \* The temperature unit of thermostat and speaker must be the same.

\* Alexa, what is the temperature of <device name>.

#### Google Assistant

- \* OK,Google.turn on <device name>.
- \* OK,Google. make it warmer in <device name>.
- \* OK,Google.turn off <device name>.
- \* OK,Google. make it cooler in <device name>.
- \* OK,Google.set <device name> to 16 degrees. \* OK,Google. set <device name> to <mode value>.
- \* OK, Google. what is the temperature of <device name>.